

UNIQUE LIGHTING SYSTEMS

INNOVATIVE LIGHTING SOLUTIONS THAT LAST A LIFETIME

SNPC Snap-In Photocell

DESCRIPTION:

The Snap-In Photocell features a durable high impact, UV stabilized polycarbonate housing, UL listed photocontrol. The connector allows ease of installation by simply snapping the unit in place.

PHOTOCELL SPECIFICATIONS:

Switch: SPST thermal bi-metallic

Power Consumption: 0.9 watts (avg.) at 120 volts

Housing: Polycarbonate with UV resistant window

Lead Wires: 15" #18 AWG, rated 105° C

Nipple: 3/8" pipe

Nut: 3/8" pipe thermoplastic



Light Sensor: 1/2" Cadmium Sulfide (CDS) Cell

Rated Volts: 120 volts (range: 105-130)

CONNECTOR SPECIFICATIONS:

Rated Volts: 250 volts

Rated Aperature: 13 amp max.

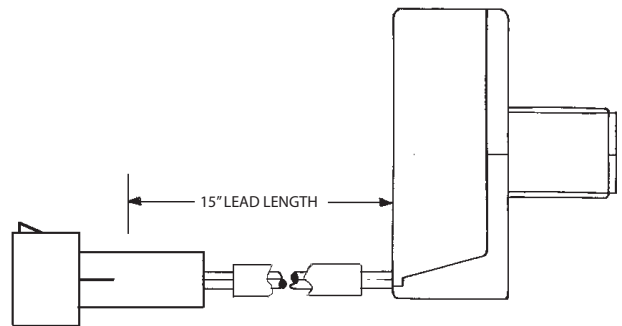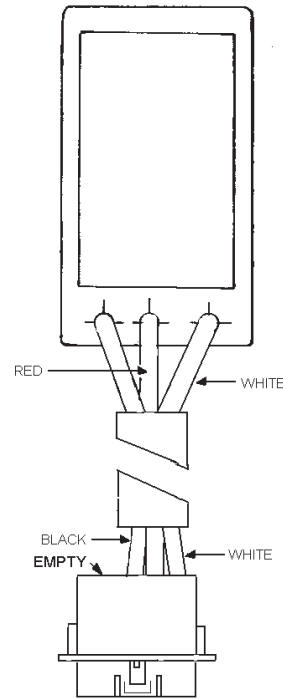

PART NUMBER:

DATE:

Model Construction/Wire Length Lamp Size Finish Options

JOB NAME:

Unique Lighting Systems

1240 Simpson Way
Escondido, CA 92029
Phone (951) 955-4831
Fax (761) 740-0977

APPROVAL:

SNPC

COMMENTS:



Unique Lighting Systems 800.955.4831

WEIGHT

SHEET 1 OF 2